





防眩圆孔天花灯(Ø55)

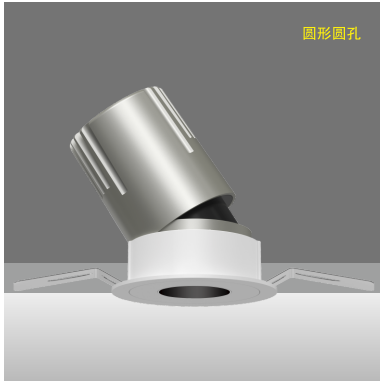

圆形圆孔



*可选配件

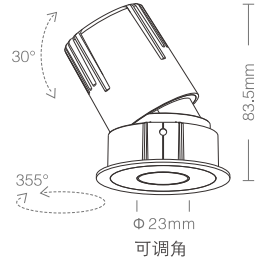

产品特性

- 灯具颜色: 金属灰+白色面板
- 主体材质: 压铸铝
- 光学系统: 透镜+面板
- 灯具外观: 金属质感
- 投射方向: 垂直0~30°、水平0~355°
- 防护等级: IP20 可选配IP44防水组件
- 环境温度: -20°~40°
- 重量: 132g

产品规格

- 开孔尺寸: Ø55mm
- 功率: 10W
- 光束角度: 15°、24°、36°
- 天花厚度: 2mm~25mm
- 安装方式: 嵌入式
- 吊顶空间: 大于100mm
- 防眩角度: 40°
- 输入电压: 220~240V~50Hz
- 输入电流: 45mA
- 显指: Ra92
- 色温: 2700K、3000K、3500K、4000K
- 光通量: 525lm、547lm、586lm、674lm (15°)
584lm、609lm、651lm、676lm (24°)
622lm、648lm、693lm、719lm (36°)

以下可调光款为可控硅调光; 0~10V调光:T改为M

色温	可调光	不可调光	光束角	h(m)	D(cm)	average (lx)	center (lx)	光通量分布图	
2700K	TSF1055W10-TB2715	TSF1055W10-NB2715	15°	1.0	29	3290	4724	[Light Distribution Diagram]	
	2.0	57		823	1181				
3.0	86	366		525					
4.0	114	206		295					
3000K	TSF1055W10-TB3015	TSF1055W10-NB3015		1.0	29	3428	4920		
	2.0	57		857	1230				
3500K	TSF1055W10-TB3515	TSF1055W10-NB3515		1.0	29	3668	5265		
	2.0	57		917	1316				
4000K	TSF1055W10-TB4015	TSF1055W10-NB4015		1.0	29	4223	6062		
	2.0	57		1056	1516				
2700K	TSF1055W10-TB2724	TSF1055W10-NB2724		24°	1.0	39	2093	3055	[Light Distribution Diagram]
	2.0	79			523	764			
3000K	TSF1055W10-TB3024	TSF1055W10-NB3024	1.0		39	2180	3183		
	2.0	79	545		796				
3500K	TSF1055W10-TB3524	TSF1055W10-NB3524	1.0		39	2332	3405		
	2.0	79	583		851				
4000K	TSF1055W10-TB4024	TSF1055W10-NB4024	1.0		39	2419	3533		
	2.0	79	605		883				
2700K	TSF1055W10-TB2736	TSF1055W10-NB2736	36°		1.0	62	1028	1571	[Light Distribution Diagram]
	2.0	123			257	393			
3000K	TSF1055W10-TB3036	TSF1055W10-NB3036			1.0	62	1071	1636	
	2.0	123			268	409			
3500K	TSF1055W10-TB3536	TSF1055W10-NB3536		1.0	62	1146	1751		
	2.0	123		287	438				
4000K	TSF1055W10-TB4036	TSF1055W10-NB4036		1.0	62	1189	1816		
	2.0	123		297	454				